


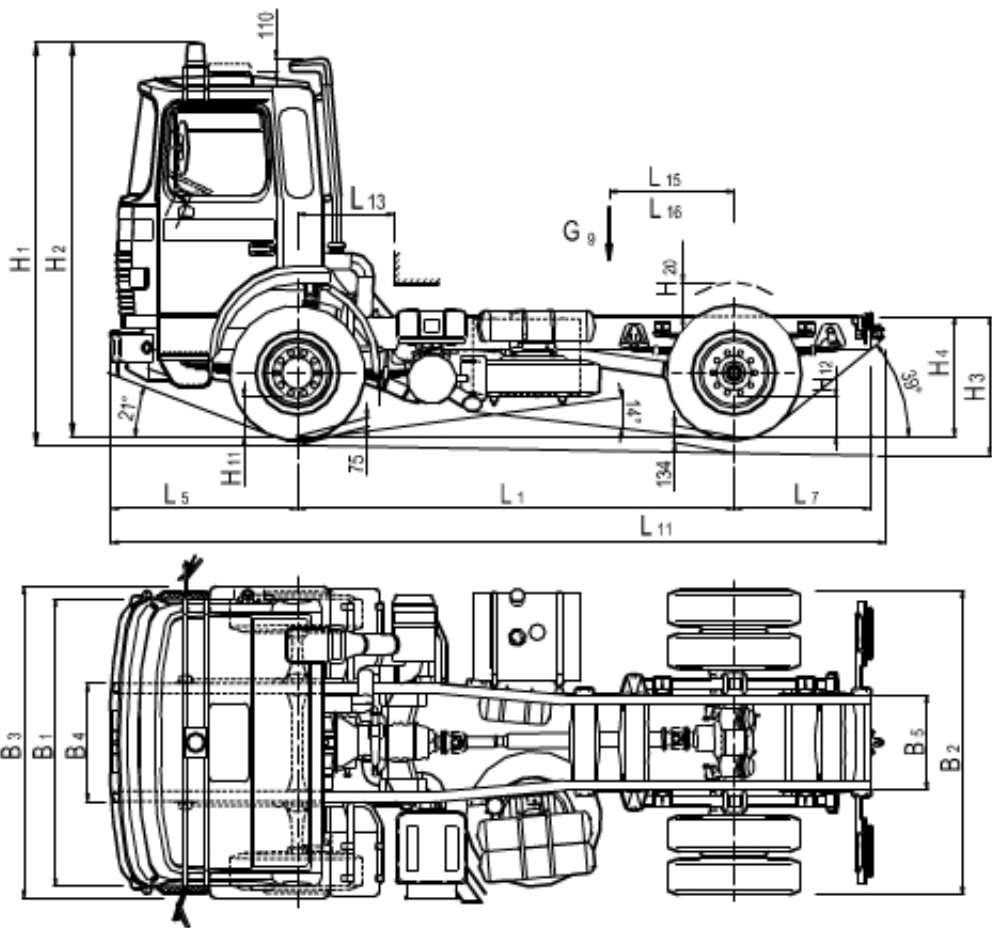

LENGTHS (mm)

L1 Wheelbase	3 500
L5 Front overhang	

	1 500
L6 Rear overhang	
	1 000
L7 Rear chassis overhang	
	900
L11 Total length	
	6 000
L13 Distance between front axle and superstructure	
	820
L14 Distance from twin axle center to the superstructure center of gravity max / min.	
	785/610

WIDTHS (mm)

B1 Cabin width	
	2 300
B2 Width over rear wheels	
	2 430
B3 Overall width	
	2 500
B4 Width of chassis frame front	
	940
B5 Width of chassis frame rear	
	760
B6 Min. turning circle diameter (m)	
	12,75
B7 Min. turning clearance circle diameter (m)	
	14,75

HEIGHTS (mm)

H1 Total height over cabin, unloaded	
	3 215
H2 Total height over cabin, loaded	
	3 140
H3 Chassis height, unloaded	
	1 086
H4 Chassis height, loaded	
	952
H11 Ground clearance, front	
	295
H12 Ground clearance, rear	
	315
H20 Max. lift up of the rear wheel	
	276

WEIGHTS (kg)

G1 Permissible weight on front axle	6 500
G2 Permissible weight on rear axle	10 000
G5 Total permissible weight	16 000
G6 Chassis truck net weight	6 360
G7 Chassis truck weight on front axle	4 255
G8 Chassis truck weight on rear axles	2 105
G9 Chassis truck carrying capacity	9 640
G12 Gross combination weight	-

PERFORMANCES

Maximum kinematic speed (km/h)	108
Maximum ASR limited speed (km/h)	85
Maximum climbing ability (%)	30