


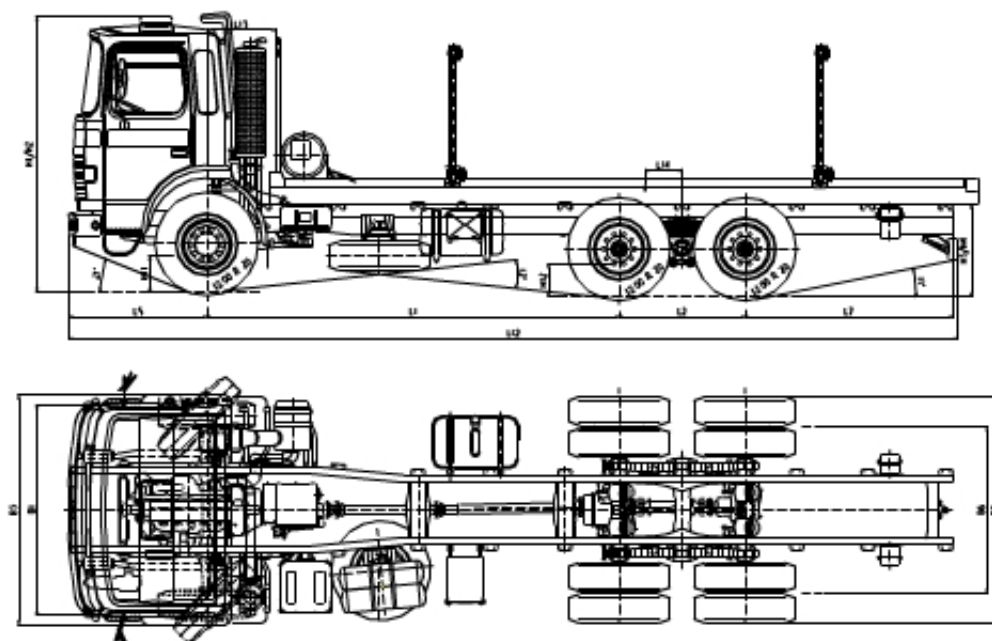

LENGTHS (mm)

L1 Wheelbase	4 490
L5 Front overhang	1 370
L6 Rear overhang	1 500
L7 Rear chassis overhang	2 340

L11 Total length	9 700
L13 Distance between front axle and superstructure	900
L14 Distance from twin axle center to the superstructure center of gravity max / min.	650/510
L16 Superstructure maximum length	7 530

WIDTHS (mm)

B1 Cabin width	2 300
B2 Width over rear wheels	2 460
B3 Overall width	2 500
B4 Width of chassis frame front	1 800
B7 Min. turning circle diameter (m)	16,0
B8 Min. turning clearance circle diameter (m)	17,8

HEIGHTS (mm)

H1 Total height over cabin, unloaded	3 110
H2 Total height over cabin, loaded	3 050
H3 Chassis height, unloaded	1 400
H4 Chassis height, loaded	1 350
H11 Ground clearance, front	300
H12 Ground clearance, rear	330
H20 Max. lift up of the rear wheel	115

WEIGHTS (kg)

G1 Permissible weight on axle 1	7 500
G2 Permissible weight on axle 2	9 500
G3 Permissible weight on axle 3	

	9 500
G5 Total permissible weight	
	26 000
G6 Chassis truck net weight	
	10 500
G7 Chassis truck weight on front axle	
	5 500
G8 Chassis truck weight on rear axles	
	5 000
G9 Chassis truck carrying capacity	
	15 500
G12 Gross combination weight	
	-

PERFORMANCES

Maximum speed (km/h)	
	87
Maximum climbing ability (%)	
	28