


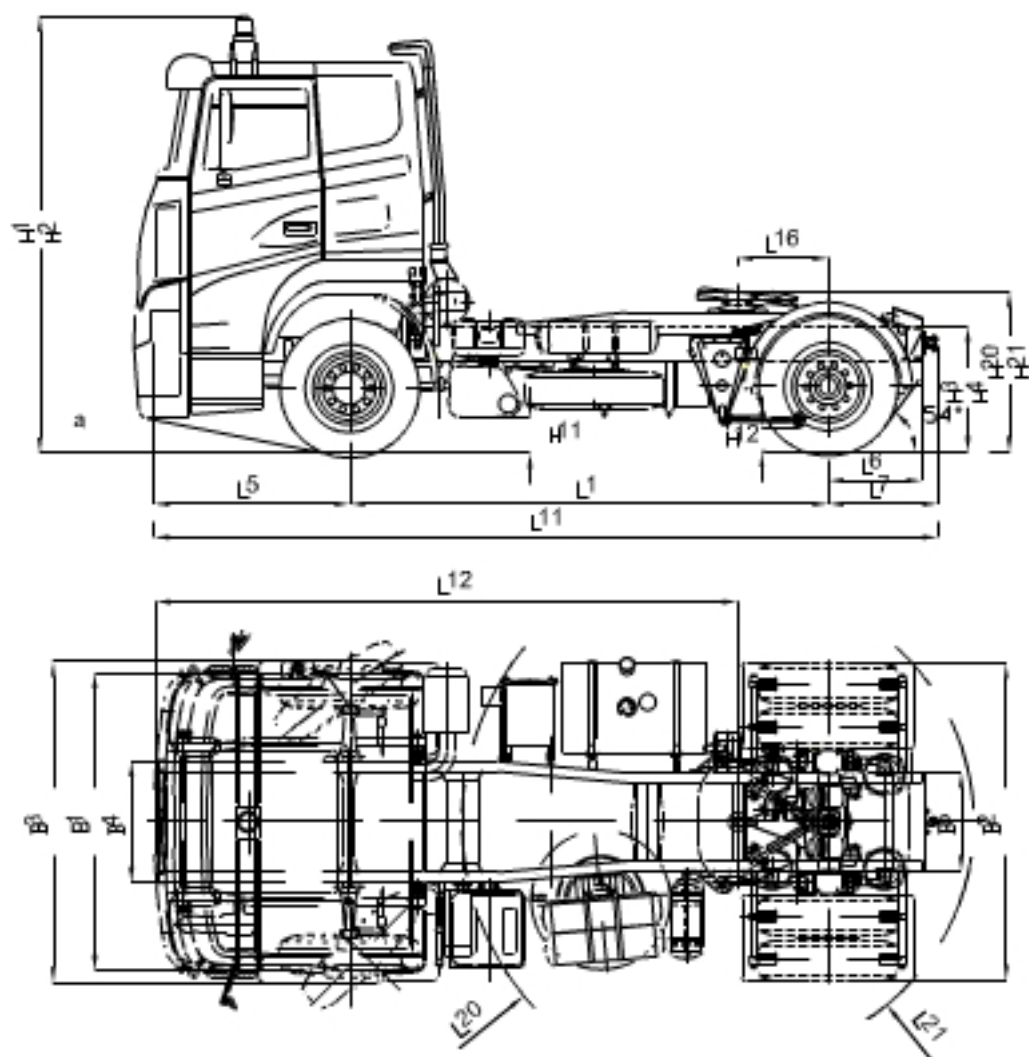

LENGTHS (mm)

L1 Wheelbase	3 700	
L5 Front overhang	1 570	
L6 Rear overhang	725	
L7 Rear chassis overhang	850	
L11 Total length	6 120	
L12 Length to the coupling device	4 500	
L16 Distance from rear axle to the fifth wheel center	700	
L20 Operation distance front	2 120	
L21 Operation distance rear		1 950

WIDTHS (mm)

B1 Cabin width	2 390	
B2 Width over rear wheels	2 462	
B3 Overall width	2 500	
B4 Width of chassis frame front	940	
B5 Width of chassis frame rear	760	
B6 Min. turning circle diameter (m)	13,60	
B7 Min. turning clearance circle diameter (m)	15,20	

HEIGHTS (mm)

H1 Total height over cabin, unloaded (with beacon)	3 290	
H2 Total height over cabin, loaded (with beacon)		3 215
H3 Chassis height, unloaded (on the rear axle)	995	
H4 Chassis height, loaded (on the rear axle)		960
H11 Ground clearance, front		

	285
H12 Ground clearance, rear	
	175
H20 Fifth wheel height unloaded	
	1 265
H21 Fifth wheel height loaded	
	1 230

WEIGHTS (kg)

G1 Permissible weight on front axle	
	7 500
G2 Permissible weight on rear axle	
	11 500
G5 Total permissible weight	
	18 500
G6 Prime mover net weight	
	7 600
G7 Chassis truck weight on front axle	
	5 150
G8 Chassis truck weight on rear axles	
	2 450
G9 Fifth wheel permissible load	
	10 700
G12 Gross combination weight	
	40 000

PERFORMANCES

Maximum kinematic speed (km/h)	
	107
Maximum ASR limited speed (km/h)	
	85
Maximum climbing ability (%) at GCW	
	21