
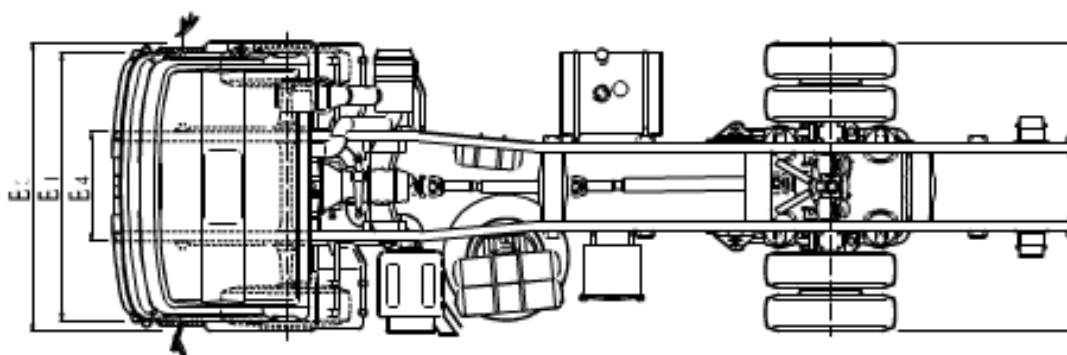


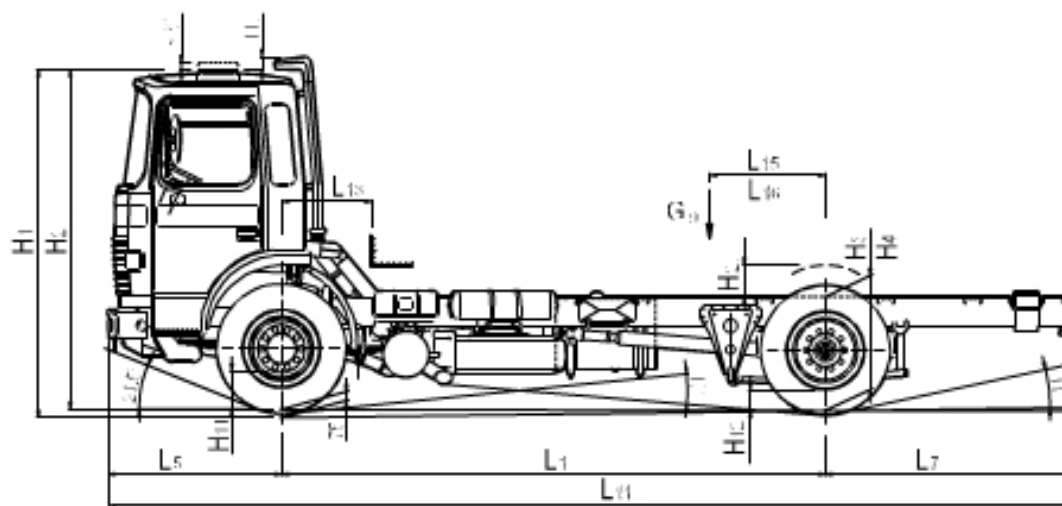

LENGTHS (mm)

L1 Wheelbase

4 700

L5 Front overhang

	1 500	
L6 Rear overhang	2 385	
L7 Rear chassis overhang	2 200	
L11 Total length	8 585	
L13 Distance between front axle and superstructure	980	
L15 Distance from twin axle center to the superstructure center of gravity max.	1 080	
L16 Distance from twin axle center to the superstructure center of gravity min.	880	

WIDTHS (mm)

B1 Cabin width	2 300	
B2 Width over rear wheels	2 462	
B3 Overall width		2 500
B4 Width of chassis frame front	942	
B5 Width of chassis frame rear	762	
B6 Min. turning circle diameter (m)	16,32	
B7 Min. turning clearance circle diameter (m)	17,13	

HEIGHTS (mm)

H1 Total height over cabin, unloaded	3 000	
H2 Total height over cabin, loaded	2 925	
H3 Chassis height, unloaded	981	
H4 Chassis height, loaded	981	
H11 Ground clearance, front	315	
H12 Ground clearance, rear	180	

H20 Max. lift up of the rear wheel	274
------------------------------------	-----

WEIGHTS (kg)

G1 Permissible weight on front axle	7 000
G2 Permissible weight on rear axle	11 500
G5 Total permissible weight	18 000
G6 Chassis truck net weight	6 750
G7 Chassis truck weight on front axle	4 650
G8 Chassis truck weight on rear axles	2 100
G9 Chassis truck carrying capacity	11 250
G12 Gross combination weight	26 000

PERFORMANCES

Maximum kinematic speed (km/h)	102
Maximum ASR limited speed (km/h)	85
Maximum climbing ability (%)	30