
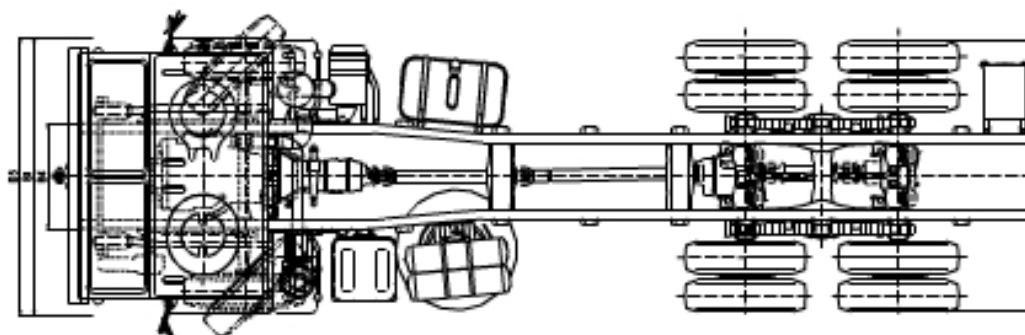


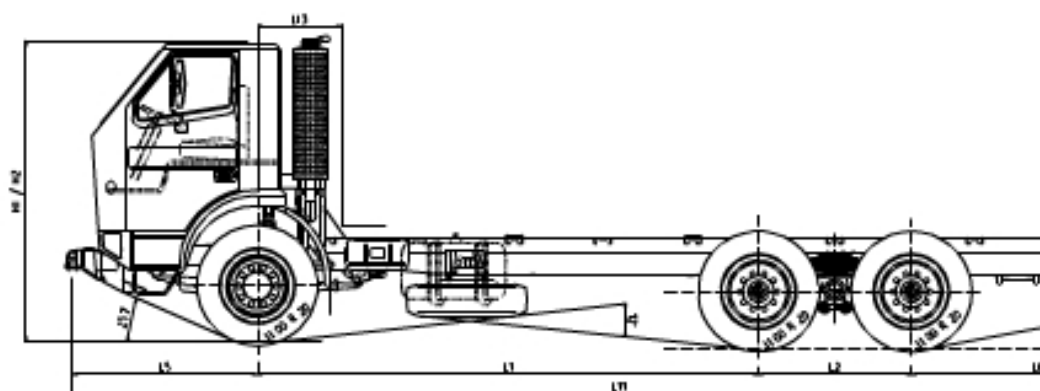

LENGTHS (mm)

L1 Wheelbase between axle 1 and 2	4 490
L2 Wheelbase between axle 2 and 3	1 370
L5 Front overhang	1 500
L6 Rear chassis overhang	

2 265

L11 Total length

9 625

L13 Distance between front axle and superstructure

750

L14/L15 Distance from twin axle center to the superstructure center of gravity max / min.

550/400

WIDTHS (mm)

B1 Cabin width

2 300

B2 Width over rear wheels

2 422

B3 Overall width

2 500

B4 Width of chassis frame front

942

B5 Width of chassis frame rear

762

B6 Min. turning circle diameter (m)

17,60

B7 Min. turning clearance circle diameter (m)

19,30

HEIGHTS (mm)

H1 Total height over cabin, unloaded

2 810

H2 Total height over cabin, loaded

2 770

H3 Chassis height, unloaded

1 100

H4 Chassis height, loaded

990

H11 Ground clearance, front

300

H12 Ground clearance, rear

320

WEIGHTS (kg)

G1 Permissible weight on axle 1

6 500

G2 Permissible weight on axle 2

	10 000	
G3 Permissible weight on axle 3	10 000	
G5 Total permissible weight	26 000	
G6 Chassis truck net weight		8 750
G7 Chassis truck weight on axle 1	4 650	
G8 Chassis truck weight on rear axles	4 100	
G9 Chassis truck carrying capacity	17 250	
G11 Gross combination weight	-	

PERFORMANCES

Maximum kinematic speed (km/h)	91
Maximum climbing ability (%)	30